



Submittal Data Information

101-085

Model 0010-IFC® Cartridge Circulator

Effective: June 20, 2007

Supersedes: December 1, 2003

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	IMP. DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.

Features

- Integral Flow Check (IFC®)
 - Prevents gravity flow
 - Eliminates separate in-line flow check
 - Reduces installed cost, easy to service
 - Improved performance vs. In-line flow checks
- Unique replaceable cartridge-Field serviceable
- Unmatched reliability - Maintenance free
- Quiet, efficient operation
- Direct drive - Low power consumption
- Self lubricating, No mechanical seal
- Standard high capacity output - Compact design
- Wide range of applications
- Cast Iron, Bronze or Stainless Steel construction, Flanged connections

Materials of Construction

- Casing (Volute): Cast Iron, Bronze or 304 Stainless Steel
- Integral Flow Check:
 - Body, Plunger....Acetal
 - O-ring, Seals.....EPDM
 - Spring.....Stainless Steel
- Stator Housing: Aluminum
- Cartridge: Stainless Steel
- Impeller: Non-Metallic
- Shaft: Ceramic
- Bearings: Carbon
- O-Ring & Gaskets: EPDM

Model Nomenclature

- F – Cast Iron, Flanged
 BF – Bronze, Flanged
 SF – 304 Stainless Steel
 IFC – Integral Flow Check
- Variations:
 Z – Zoning Circulator
 J – Bronze Cartridge with Cast Iron Casing

Performance Data


- Flow Range: 0 - 18.5 GPM
 Head Range: 0 - 9 Feet
 Minimum Fluid Temperature: 40°F (4°C)
 Maximum Fluid Temperature: 230°F (110°C)
 Maximum Working Pressure: 125 psi
 Connection Sizes: 3/4", 1", 1-1/4", 1-1/2" Flanged

Application

The 0010-IFC with an Integral Flow Check is designed to reduce installation costs when zoning with 00® circulators. Ideal for residential / light commercial hydronic or radiant heating, hydro-air fan coils, indirect water heaters or domestic water recirculation systems. By locating the IFC inside the pump casing, a separate in-line flow check is eliminated, reducing installation costs. The reduced pressure drop of the IFC increases the flow performance over in-line check valves. Both the IFC and cartridge are easily accessed for service instead of replacing the entire unit. Our patented Priority Zoning Circulator with built-in transformer, relay priority switch and optional IFC in one complete, compact package makes it ideal for zoning. Available in Cast Iron, Bronze or Stainless Steel construction.

Pump Dimensions & Weights


Model	Casing	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
0010-F3-I IFC	Iron	7-1/4	184	5-5/16	135	3-3/16	81	3-5/16	84	5-3/8	137	6-3/8	162	10	4.5
0010-BF3-IFC	Bronze	7-1/4	184	5-5/16	135	3-3/16	81	3-5/16	84	5-3/8	137	6-3/8	162	10	4.5
0010-SF3-IFC	St.Steel	7-1/4	184	5-5/16	135	3-3/16	81	3-5/16	84	5-3/8	137	6-3/8	162	9	4.0
0010-ZF3-I IFC	Iron	7-1/4	184	5-5/16	135	3-3/16	81	3-13/16	97	5-7/8	150	6-3/8	162	11	5.0
0010-ZBF3-I IFC	Bronze	7-1/4	184	5-5/16	135	3-3/16	81	3-13/16	97	5-7/8	150	6-3/8	162	11	5.0
0010-ZSF3-IFC	St.Steel	7-1/4	184	5-5/16	135	3-3/16	81	3-13/16	97	5-7/8	150	6-3/8	162	10	4.5

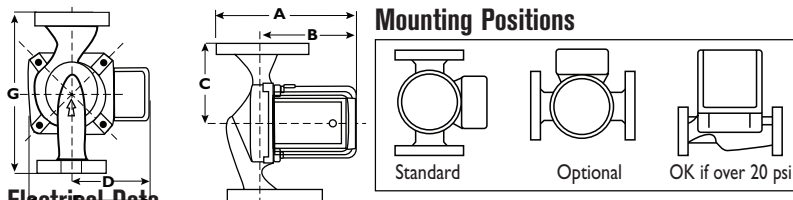


Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
Cast Iron	115	60	1	1.10	3250	1/8
Bronze				1.17		
Stainless Steel				1.17		
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

Flange Orientation



Performance Field - 60Hz

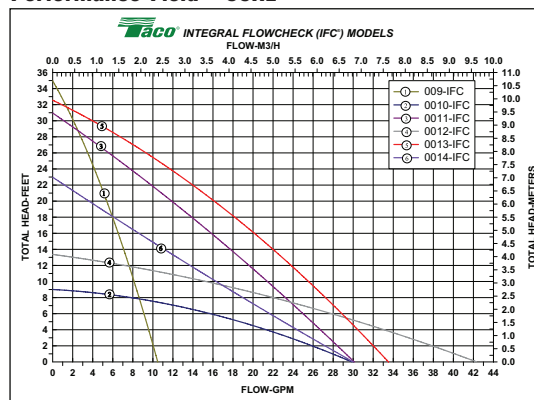

FOR INDOOR USE ONLY

Do it Once. Do it Right.®

TACO INC., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360
 TACO (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436
 Visit our website at: www.taco-hvac.com

Printed in USA
 Copyright 2007
 TACO, Inc.